

INFORMATION SHEET

HP5 *Plus*

BLACK AND WHITE SINGLE USE CAMERA


SINGLE USE BLACK AND WHITE CAMERA WITH BUILT-IN FLASH

Black and white is back in magazines, music videos, advertising and even major movies. A whole generation has grown up surrounded by colour images and they are excited by the novelty of monochrome images. The easy to use ILFORD single use camera offers the opportunity for them to try black and white photography for themselves.


The camera is attractively packaged with strong monochrome images and striking graphics and is ready for counter display. It is loaded with (24+3) 27 exposures of the excellent ILFORD HP5 Plus ISO 400/27° film. The price of the camera does not include processing but the film can be processed through any traditional retailer-photofinisher processing route. (See overleaf for development time recommendations).

WARNING: DUE TO HIGH VOLTAGE PLEASE DO NOT OPEN CAMERA.


The camera has a built-in flash effective up to 3m/10ft, an f 9.5 30mm lens and a shutter speed of 1/100 sec. It is focus free and gives sharp pictures from 1 metre/3ft to infinity. The camera is supplied with the film wound out of the cassette and the film is wound back as each picture is taken. A frame counter shows the number of pictures remaining. Safety interlocks prevent double exposures or blank frames.

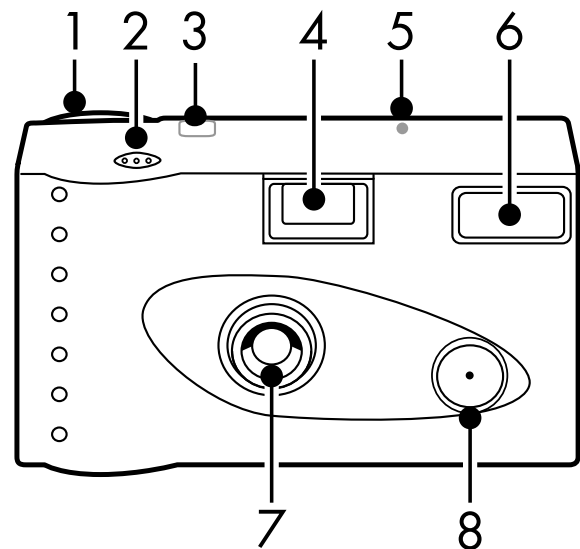


- 1** Film advance
- 2** Shutter button
- 3** Exposure counter (back of camera)
- 4** Viewfinder
- 5** Flash ready light (back of camera)
- 6** Flash window
- 7** Lens
- 8** Flash button




Wind film until it stops.




Minimum distance of subject from camera 1m/3ft. For portraits 2m/6ft.




Hold camera steady. Press shutter.



On dark days, in deep shade or indoors, use flash.



For flash, press the "Flash Button" until the ready light goes on.



Then take the picture. After the last picture, wind the film to the end (E).

SINGLE USE BLACK AND WHITE CAMERA

ILFORD HP5 Plus is a fast black and white film. It is ideal for action, available light and general purpose photography. HP5 Plus is compatible with all major processing systems, including those which give the standard short fixing and washing times.

More information about using HP5 Plus and other ILFORD products can be found on our web-site at www.ilford.com.

DEVELOPMENT TIMES - FOR TRADE PROCESSORS ONLY **Spiral tank, deep tank, dip and dunk machines (min/20°C/68°F)**

ILFORD developer		
ILFOSOL S	1+9	7
	1+14	9½
ILFOTEC HC	1+15	3½
	1+31	6½
ILFOTEC LC29	1+9	3½
	1+19	6½
	1+29	9
ID-11	stock	7½
	1+1	13
	1+3	20
MICROPHEN	stock	6½
	1+1	12
	1+3	23
Non-ILFORD developer		
Acufine Acufine	stock	4½
Agfa Refinal	stock	6
Agfa Rodinal	1+25	6
	1+50	11
Kodak D-76	stock	7½
	1+1	11
	1+3	22
Kodak HC-110	A	2½
	B	5
Kodak T-Max	1+4	6½
Kodak Xtol	stock	8
	1+1	12
Paterson Acutol	1+10	7
Tetenal Ultrafin	1+10	7½
	1+20	16
Tetenal Ultrafin Plus	1+4	7

Dip and dunk machines (min/24°C/75°F)

ILFOTEC DD	1+4	7
Kodak T-Max RS	stock	4½
Kodak Xtol	stock	7½

ILFOLAB FP40, roller transport and short leader machines (sec)

ILFOTEC RT RAPID (26°C/79°F)	1+1+2	60
ILFOTEC RT RAPID (26°C/79°F)	1+1+5	70
ILFOTEC HC (24°C/75°F)	1+11	55
Kodak Duraflo RT (26°C/79°F)	stock	60

A wide range of fact sheets is available which describe and give guidance on using ILFORD products. Some products in this fact sheet might not be available in your country.